

CUT SHEET


45/60/90 Minute Neutral Pressure Mineral Core Doors

These will be solid mineral core flush doors supplied by Nightingale Architectural Doors in accordance with AWS Section 9, type FD-5, FD-7, or FD-HPDL-5

Maximum Size: Single 4/0 10/0 · Pair 4/0 8/0 ea leaf

Max. Temp. Rise: 250°F @ 30 min.

CONSTRUCTION DETAILS

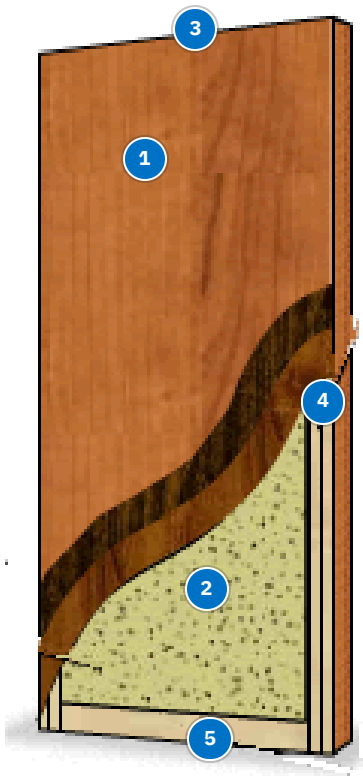

1 Faces

2 or 3 ply pre-manufactured veneered wood door skins with .020" min. face ply, or P-LAM with appropriate crossbanding.

2 Core

Mineral core as manufactured by Georgia-Pacific Corp.

3 Top Rail

2" - 3" Firestop as manufactured by Georgia-Pacific Corp. with optional ½" hardwood.

4 Stiles

1" - 5" GP Firestop (as manufactured by Georgia-Pacific Corp.) with optional ¼" max. hardwood

5 Bottom Rail

2" - 4" Firestop (as manufactured by Georgia-Pacific Corp.)

Adhesive: Type I standard (water resistant)

Labeling Service: Warnock Hersey Int., Authorized by Intertek Testing Services