

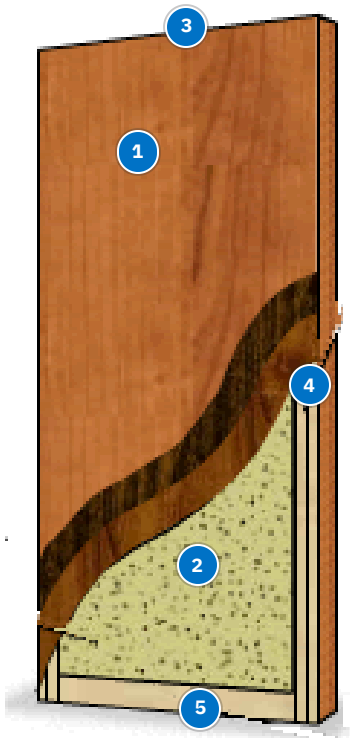
CUT SHEET

45 Minute PP and NP Agrifiber Doors

These will be Agrifiber core flush doors supplied by Nightingale Architectural Doors in accordance with AWS Section 9, type FD-5, FD-7 or FD-HPDL-5

Maximum Size: Singles 4/0 10/0 • Pairs 4/0 8/0

Max. Temp. Rise: 250°F @ 30 min. with < 100 sq. in. glass lites

CONSTRUCTION DETAILS**1 Faces**

Wood: 2 or 3 ply AA, A, or paint grade wood veneer door skins with .020" min. face ply before sanding. Book match with running match standard. Pair match and slip match available; or P-LAM: High pressure laminate with 3/32" HDF crossband.

2 Core

Agrifiber, 28 LB min. Density

3 Top Rail

Over 8' high, pairs: NP and PP cat B: 2" mineral composite with ½" max. SCL or hardwood. PP cat A, same as NP but with intumescent. 8' and under (single doors): PP and NP, 1½" SCL and Hardwood with intumescent.

4 Stiles

For doors up to 4'x 8': Cat A, PP or NP, 1½" SCL/Hardwood with intumescent. For doors 3'x8' or smaller: Cat B or NP, 1¼" SCL/hardwood

5 Rails

2" minimum mineral, or 2" SCL/hardwood (as required) before trim.

Adhesive: Type I standard (water resistant)

Labeling Service: Warnock Hersey Int., Authorized by Intertek Testing Services