

CUT SHEET

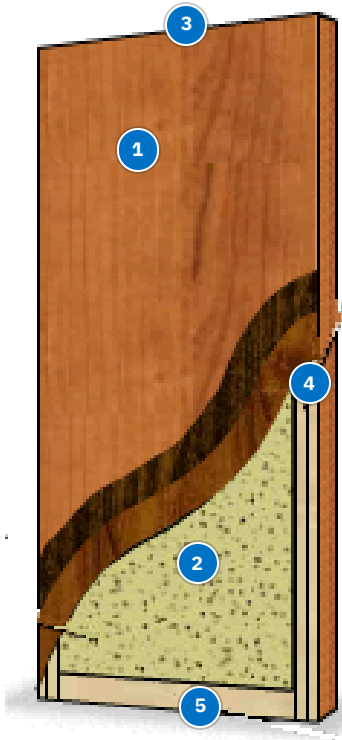
60 Minute PP and NP Agrifiber Doors (single doors only)

These will be Agrifiber core flush doors supplied by Nightingale Architectural Doors in accordance with AWS Section 9, type FD-5, FD-7 or FD-HPDL-5

Maximum Size: 4/0 8/0

Max. Temp. Rise: 250°F @ 60 min.

No Vision Panels allowed

CONSTRUCTION DETAILS**1 Faces**

Wood: 2 or 3 ply AA, A, or paint grade wood veneer door skins with .020" min. face ply before sanding. Book match with running match standard. Pair match and slip match available; or P-LAM: High pressure laminate with 3/32" HDF crossband.

2 Core

Agrifiber, 28 LB min. Density

3 Top Rail

NP: 2" mineral composite with intumescent and ½" max. hardwood or SCL. PP: Same as NP but with intumescent

4 Stiles

NP: 2" mineral composite with ½" max. hardwood or SCL. PP: Same as NP but with intumescent.

5 Bottom Rail

2" mineral composite, plus ½" hardwood optional

Adhesive: Type I standard (water resistant)

Labeling Service: Warnock Hersey Int., Authorized by Intertek Testing Services