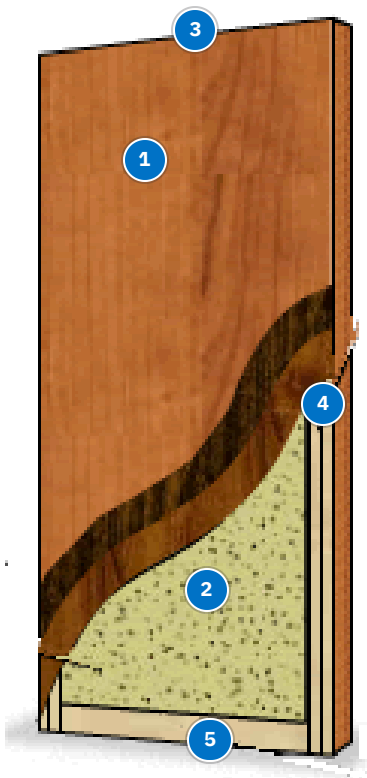


CUT SHEET

Particle Board Core (PBC) Doors

Wood Veneer Faces

These will be solid particle board core flush wood doors supplied by Nightingale Architectural Doors in accordance with AWS Section 9, type PC-5 or PC-7, and WDMA 1.S. 1-A 04

CONSTRUCTION DETAILS**1 Faces**

2 or 3 ply AA, A, or paint grade wood veneer door skins with .020" min. face ply before sanding. Book match with running match standard. Pair match and slip match available.

2 Core

Bonded, wood particle board 28 - 32 LB/cubic foot density, grade 1-LD-2

3 Top Rail

Hardwood, or Hardwood + Timberstrand. Minimum overall width 1½".

4 Stiles

Solid matching hardwood or ½" matching hardwood over mill option lumber or SCL to match veneer. Minimum overall stile width 1¼".

5 Bottom Rail

Hardwood or SCL/Timberstrand. Minimum overall width 1½"

Adhesive: Type I standard (water resistant)

Label: These doors are eligible for a 20 minute neutral pressure fire label